No part of this document may be re-produced or transmitted in any form or stored in any retrieval system of any nature without the written permission from Homan O'Brien Associates as copyright holder except as agreed for use on the project for which the document was originally issued. © Homan O'Brien Associates Copyright.

Notes:

1. The installation shall comply fully with IS1010 Regulations.
2. Refer to Lighting Impact Assessment for specification for all light fittings.

Symbols Reference:

XL1	14.4 W LED Continuous Recessed 3000K, IP65, IK10.
XL2	38 W LED, Roadway Lighting Lantern, 3000K, IP65, IK08, All mounted on A 6m Pole.
XL3	40 W LED, Post Top Lantern Light Fitting, 3000K,IP65, IK08, All mounted on A 4m Pole.
XL4	8 W LED, Surface Wall Mounted Light Fitting, 3000K, IP65, IK06.
XL5	25 W LED, Surface Wall Mounted Light Fitting, 3000K, IP65, IK06.
XL6	6.5 W LED Continuous Handrail Strip Light 3000K, IP65, IK10.
XL7	10.5 W LED Ground Mounted Recessed Circular Uplighter, 3000K, IP65, IK09.
XL8	14.4 W LED Continuous Surface 3000K, IP65, IK10.

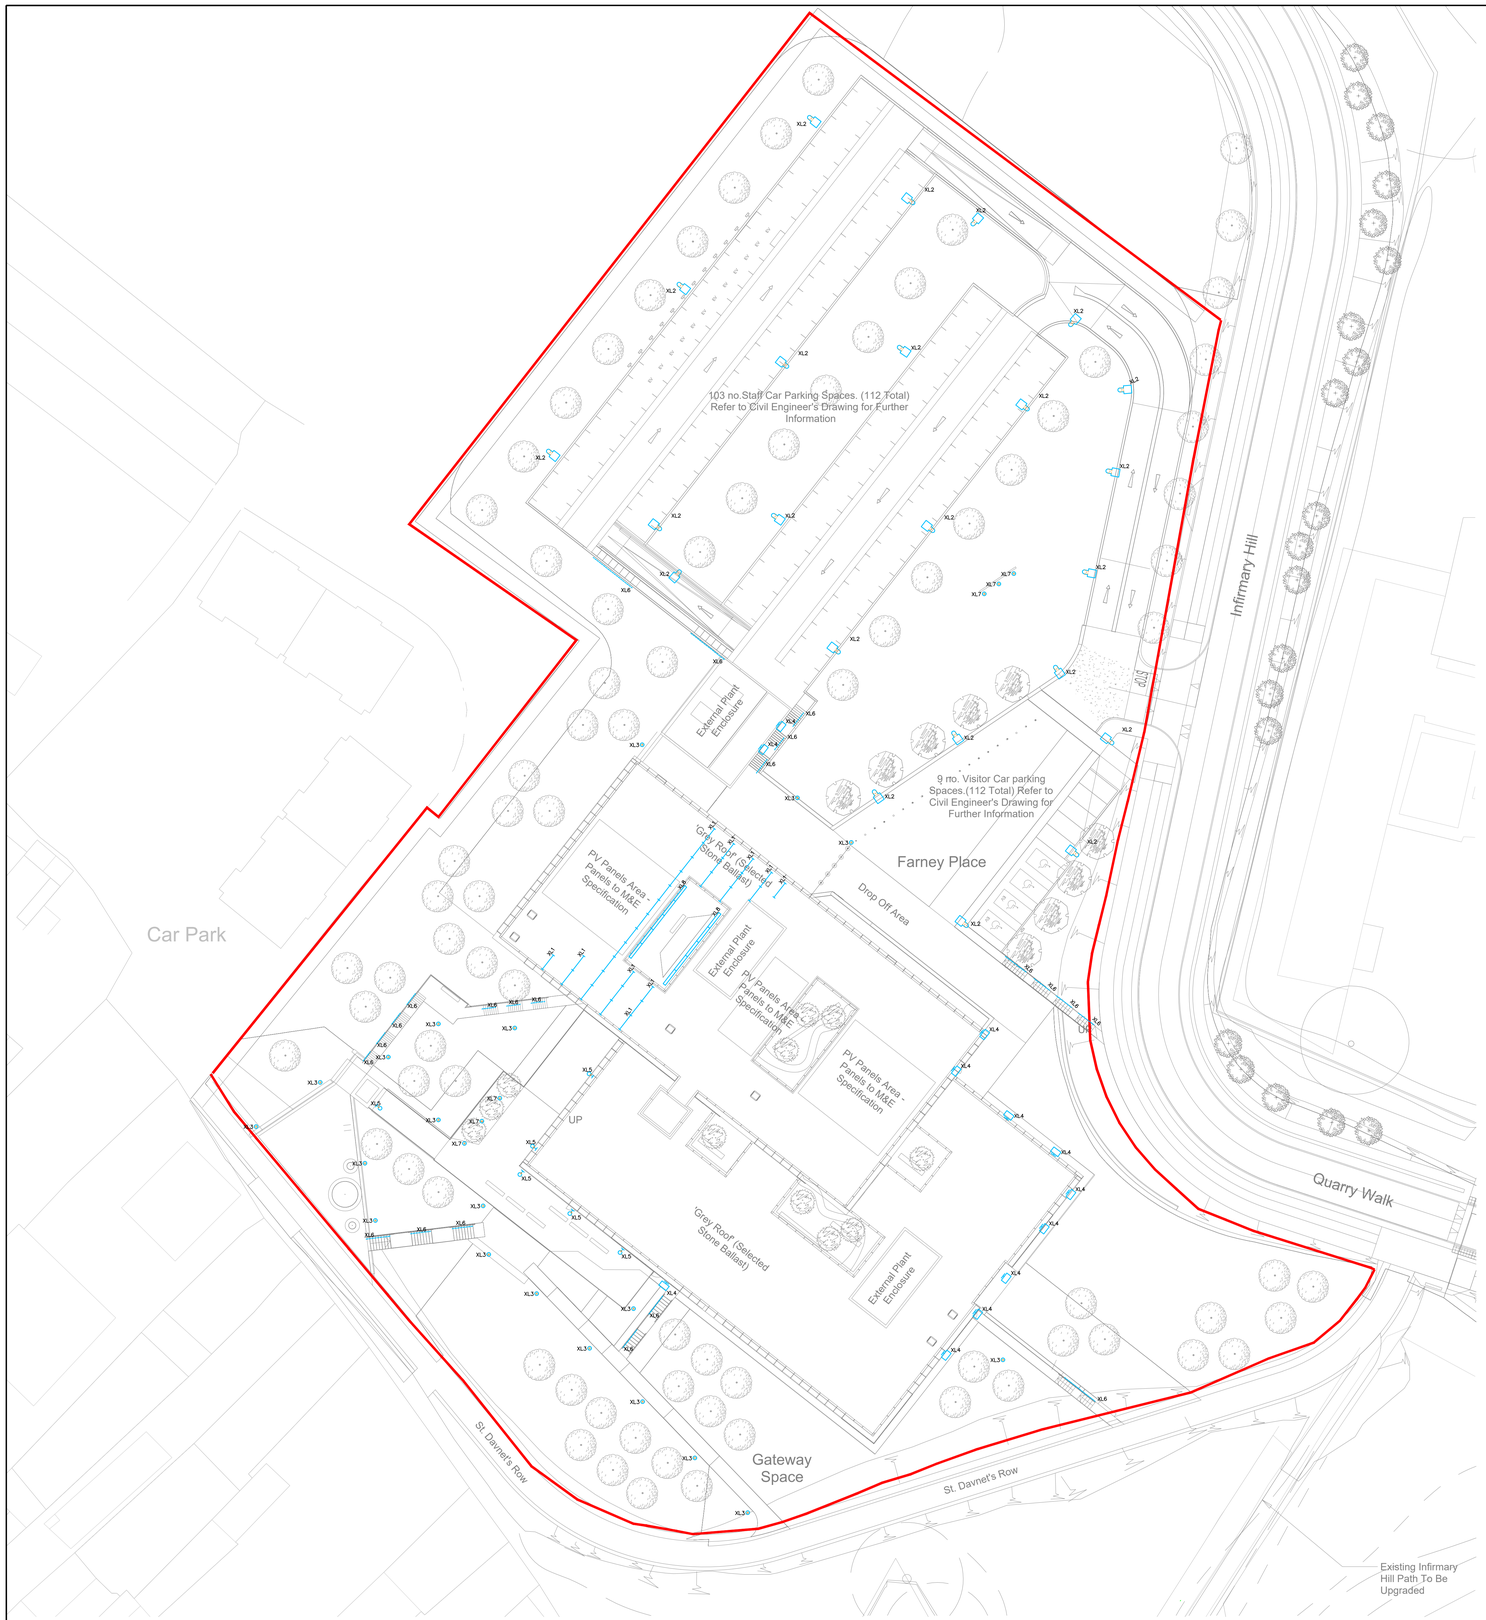

ISSUED FOR PLANNING

0 6 12 18 24 30
METRES

Revision	Issue: P–Preliminary T–Tender CN–Construction A–Approval I–Information	Date	Checked

Revision	Issue: P–Preliminary T–Tender CN–Construction A–Approval I–Information	Date	Checked

Revision	Issue: P–Preliminary T–Tender CN–Construction A–Approval I–Information	Date	Checked
	Issued for Planning.	23–11–2023	P01 S.S.

HOMAN O'BRIEN
Engineering Excellence.
Consulting Engineers
89 Booterstown Avenue, Blackrock, Co. Dublin.
Telephone: 2056300, Fax: 2056301
E–mail: info@homanobrien.ie
Web: www.homanobrien.ie

Monaghan Co. Council,
New Civic Offices
Dublin Street North,
Monaghan, Co. Monaghan.

Monaghan Co. Council,
The Glen,
Glen Road, Killygowan,
Monaghan, Co. Monaghan.

Electrical Services Installation

Site Plan
Site Lighting Layout

Henry J Lyons Architect's.
51–54 Pearse Street,
Dublin, Ireland.
D02 KA66

Drawing Number	Date	Scale	Drawn	Checked	Issue
2221–E1000	30–01–2023	Refer to Scalebar	J.S.	B.H.	P01